


**G20FS**

20 kV, 25 mA

High Voltage Diode

Features

- High peak reverse voltage
- Fast Recovery time
- Low junction capacitance
- RoHS compliant to Directive 2011/65/EC, Article 4(1), Annex II, Annex III, 7(a)

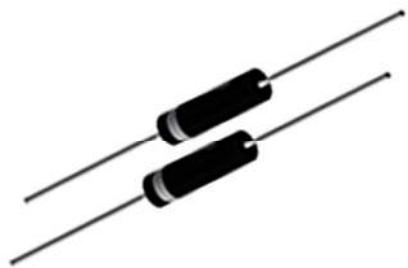

Device Electrical Characteristics

(25°C ambient temperature unless stated otherwise)

	Conditions	Symbol	Value
Repetitive Peak Reverse Voltage		V_{RRM}	20,000 Volts
Average Forward Current Maximum	$T_A = 55^\circ\text{C}$	I_{FAVM}	25 mA
Maximum Forward Voltage Drop	$I_F = 10 \text{ mA}$	V_F	35 Volts
Maximum Reverse Current	@ V_{RRM}	I_R	0.20 μA
Maximum Reverse Recovery Time	$I_F = 10 \text{ mA}; I_R = 20 \text{ mA}; I_{rr} = 5.0 \text{ mA}$	T_{RR}	100 ηsec
Typical Junction Capacitance	$f = 1 \text{ MHz}, V_R = 0 \text{ Volt}$	C_J	0.25 pF
Maximum Forward Surge Current	8.3 msec, Half Sine	I_{FSM}	3.0 Amps
Maximum Junction Temperature	-	T_J	125 °C
Maximum Storage Temperature	-	T_S	-55 °C to 150 °C

Mechanical Data

		Min.	Max.
		in.	mm
Body Length	A	-	-
Body Diameter	D	-	-
Lead Length	B	0.6	15.3
Lead Diameter	C	-	-
		0.026	0.65

CATHODE BAND

