

Power Resistors

Series HPS-150

150 W Power Resistor – only configuration 2 possible

EBG Resistors's HPS series is rated at 150 W mounted to a heat sink. The increased height of the package makes this resistor ideal in applications where creeping distance must meet the VDE 0160 and UL 94 V-0 standards.

Main applications are: motor drives & controls, medical, frequency converters and instrumentation.

Features


- 150 W operating power
- Easy mounting using already existing infrastructure
- Non-Inductive design
- ROHS compliant
- Materials in accordance with UL 94 V-0 and VDE 0160



Technical Specifications

Resistance value	1 Ω ≤ 1 MΩ (other values on special request)
Resistance tolerance	±10 % to ±1 %
Temperature coefficient	±250 ppm/°C (at +85°C ref. to +25°C) lower TCR on special request for limited ohmic values
Power rating	150 W at 85°C bottom case temperature
Maximum working voltage	500 V (up to 1,000 V DC on special request = "S"-version)
Voltage proof	5,000 V DC, 3,000 V AC
Insulations resistance	10 GΩ min. at 1,000 V DC
Comparative Tracking Index (CTI)	standard > 200 V (> 500 V on special request = "H"-version)
Heat resistance to cooling plate	Rth < 0.47 K/W
Capacitance/mass	45pF (typical), measuring frequency 10 kHz
Working temperature range	-55°C to +155°C
Mounting - max. torque for base plate (static)	1.5 Nm M5 screws
Mounting - max. torque for contacts (static)	1.3 Nm M4 screws
Weight	~38 g

Power Rating

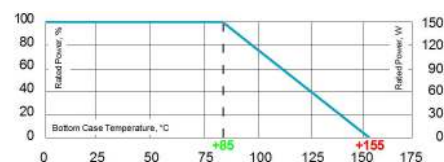

Derating (thermal resist.) HPS-150:
2.14 W/K (0.47 K/W)

Best results can be reached by using a thermal transfer compound with a heat conductivity of at least 1 W/mK. The flatness of the cooling plate must be better than 0.05 mm overall. Surface roughness should not exceed 6.4 µm.

How to make a request

HPS-2_Ohmie Value_Tolerance

For example:

HPS-2 1R 10%

Example for CTI:

HPSH-2 40K 2%

Air distance contact to contact:

Contact to contact > 9.2 mm

Contact to base plate > 13.2 mm

(with mounting screw M5 and washer)

Creeping distance:


Contact to base plate 17.0 mm

Contact to contact


- without PT-screw > 22.8 mm

- with PT-screw > 20.2 mm

Dimensions in mm [inches]

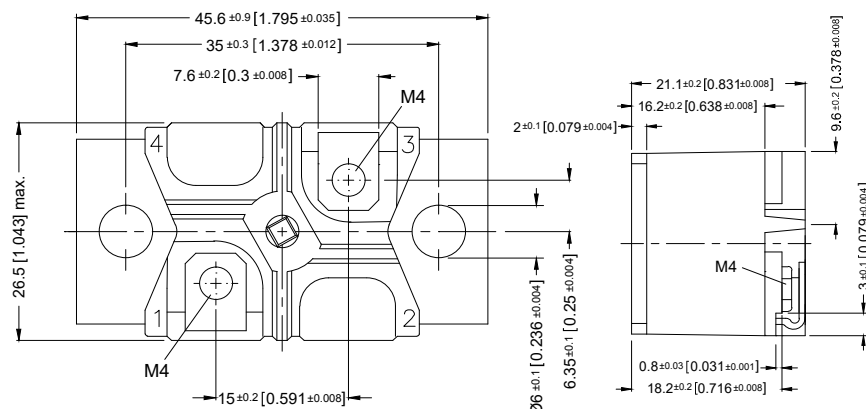

Configuration

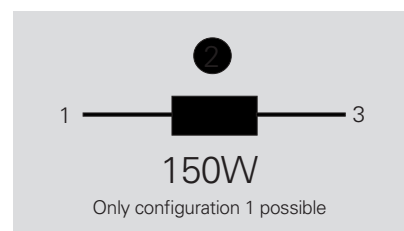

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

Power Resistors

Series HPS-150

150 W Power Resistor – only configuration 2 possible


Pulse Energy Curve (typical rating for HPS-150)

Note: These energy values are reference values → depending on ohmic value e.g. 1 Ω to 10 Ω and used resistive paste, a variation in max. energy load capability is possible

Test procedure

Every test resistor was mounted with thermal compound (0.9 W/mK) on a water cooled heatsink

- Constant inlet water temperature: +50°C
- The test time of each tested resistor: 10min.
- Break time between two pulses: 1sec.
- To determine good / defect parts the ohmic value was measured before and after tests:
a change of tolerance of more than 0.1% means defect

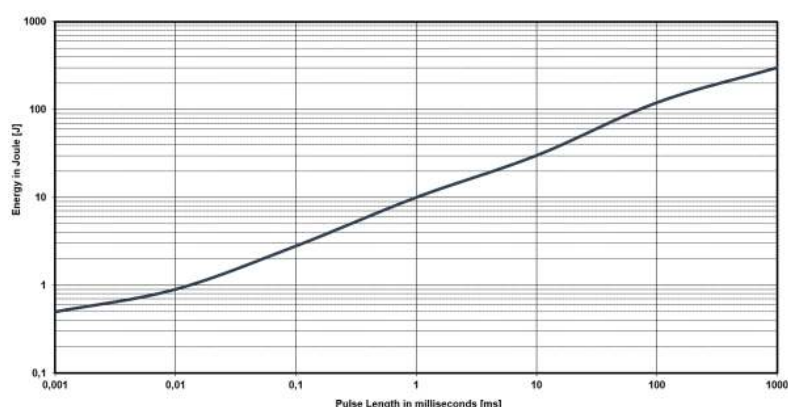

Description of Pulse Energy Curve

- Shape of pulse = e-function
- Time between two pulses = 1 second
- Pulse length = time constant of 1 tau
(1 means ... tau = 1ms)


Example

At 1 ms tau the HPS-150 with e.g. 1 Ω to 10 Ω can withstand an energy level of about 10 J, when the pulse pause time is ≥ 1 s

**At a symmetrical frequency > 1 kHz at pulse length ≥ 10 μ sec. the maximum applied pulse energy for HPS-150 is a result out of the nominal power 150 W divided by the operating frequency
(at 85°C bottom case) ($E = 150 \text{ W} / F$)**

Pulse Power Curve (typical rating for HPS-150)

The power curve shows the max. possible power which can be applied for a certain duration.
Referring to the same test procedure as described above.

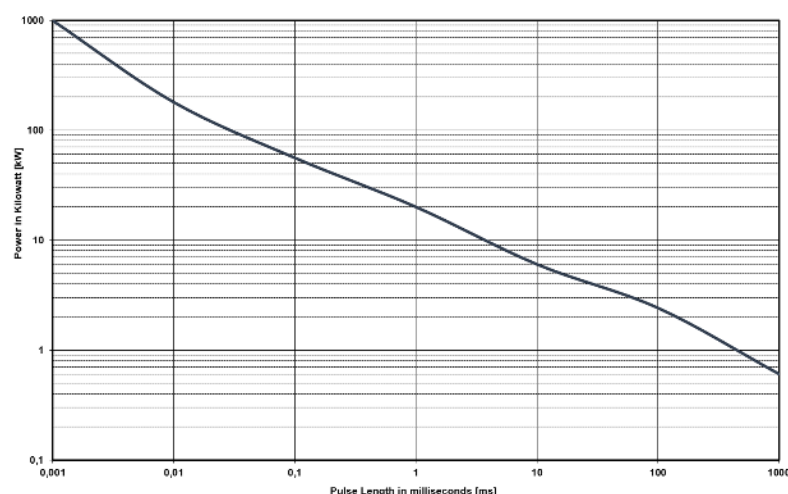

Description of Pulse Power Curve

- Shape of pulse = e-function
- Time between two pulses = 1 second
- Pulse length = time constant of 1 tau
(1 means ... tau = 1ms)

Example

For the time-constant of 1 ms you can apply about 20 kW max., if the time between two such peaks is ≥ 1 s