


Power Resistors

Series MXP-35 TO-220

35 W Thick Film Resistor for high-frequency and pulse-loading applications

Features


- 35 W operating power
- **TO-220 package** configuration
- Single-screw mounting simplifies attachment to heat sink
- Molded case for environmental protection
- Resistor element is electrically insulated from the metal sink tab
- Standard lead form for easier fit
- Non-Inductive design
- ROHS compliant
- Materials in accordance with UL 94 V-0

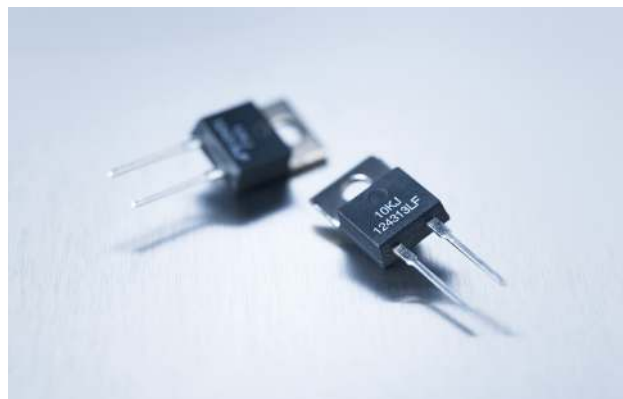

Technical Specifications

Resistance value	0.05 Ω ≤ 1 MΩ (other values on special request)
Resistance tolerance	±10 % to ±1 % ±0.5 % on special request for limited ohmic values
Temperature coefficient	< 3 Ω: ask for details > 3 Ω ≤ 10 Ω: ±100 ppm + 0.002 Ω/°C referenced to 25 °C, ΔR taken at +85°C > 10 Ω: ±50 ppm/°C referenced to 25 °C, ΔR taken at +85°C
Power rating	35 W at 25°C bottom case temperature
Maximum operating voltage	350 V
Dielectric strength voltage	1,800 V AC
Insulation resistance	> 10 GΩ at 1,000 V DC
Momentary overload	2x rated power with applied voltage not to exceed 1.5x maximum continuous operating voltage for 5 sec. ΔR ±(0.3 % + 0.01 Ω) max.
Load life	MIL-R-39009, 2,000 hours at rated power, ΔR ±(1.0 % + 0.001 Ω) max.
Moisture resistance	MIL-STD-202, method 106 ΔR = (0.3 % + 0.001 Ω) max.
Thermal shock	MIL-STD-202, method 107, Cond. F, ΔR = (0.5 % + 0.01 Ω) max.
Working temperature range	-55°C to +175°C
Terminal strength	MIL-STD-202, method 211, Cond. A (Pull Test) 2.4 N, ΔR = (0.2 % + 0.01 Ω) max.
Vibration, high frequency	MIL-STD-202, method 204, Cond. D, ΔR = (0.2 % + 0.01 Ω) max.
Lead material	tinned copper
Maximum torque	0.9 Nm
Heat resistance to cooling plate	R _{th} < 4.28 K/W
Weight	~2 g

Power Rating

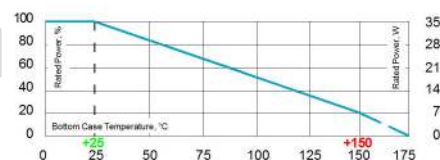

Derating (thermal resist.) MXP-35:
0.23 W/K (4.28 K/W)

Without a heat sink, when in open air at 25°C, the MXP-35 is rated for 2.50 W. Derating for temperature above 25°C is 0.02 W/K.

Case temperature must be used for definition of the applied power limit. Case temperature measurement must be done with a thermocouple contacting the center of the component mounted on the designed heat sink. Thermal grease should be applied properly.


How to make a request

MXP_Ohmic Value_Tolerance

For example:

MXP 20R 10%

Dimensions in mm [inches]

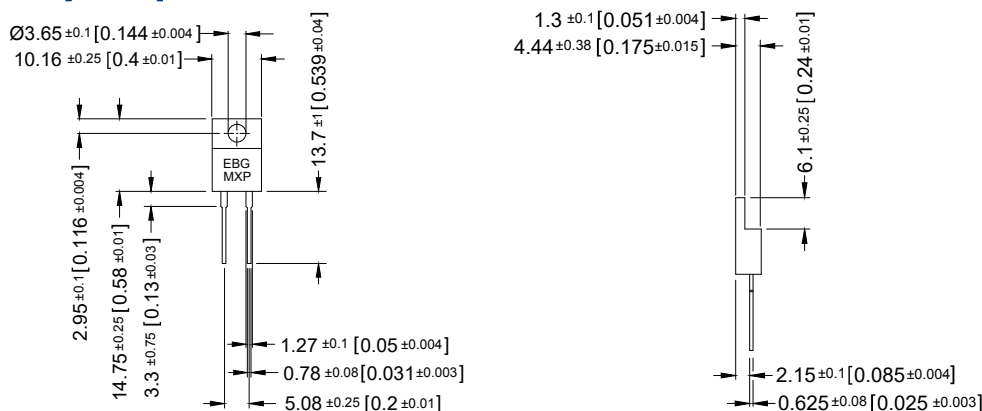

The above spec. sheet features our standard products. For further options please contact our local EBG representative or contact us directly.

Power Resistors

Series MXP-35 TO-220

35 W Thick Film Resistor for high-frequency and pulse-loading applications


Pulse Energy Curve (typical rating for MXP-35)

Note: These energy values are reference values → depending on ohmic value e.g. 1 Ω to 10 Ω and used resistive paste, a variation in max. energy load capability is possible

Test procedure

Every test resistor was mounted with thermal compound (0.9 W/mK) on a water cooled heatsink

- Constant inlet water temperature: +50°C
- The test time of each tested resistor: 10min.
- Break time between two pulses: 1sec.
- To determine good / defect parts the ohmic value was measured before and after tests:
a change of tolerance of more than 0.1% means defect

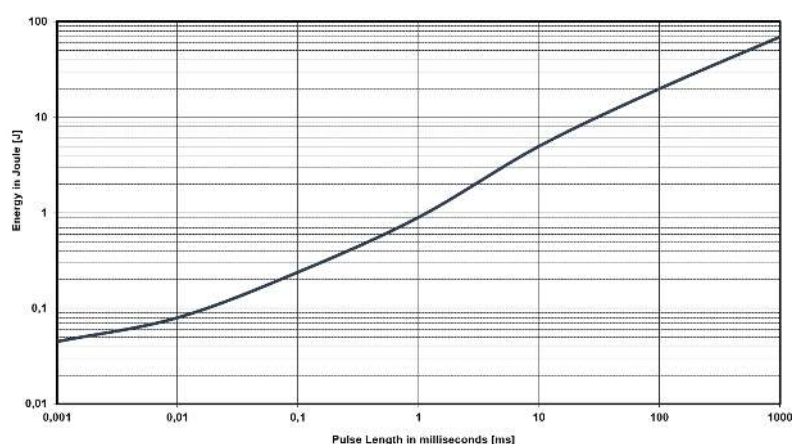

Description of Pulse Energy Curve

- Shape of pulse = e-function
- Time between two pulses = 1 second
- Pulse length = time constant of 1 tau
(1 means ... tau = 1ms)


Example

At 1 ms tau the MXP-35 with e.g. 1 Ω to 10 Ω can withstand an energy level of about 0.9 J, when the pulse pause time is ≥ 1s

At a symmetrical frequency > 1 kHz at pulse length ≥ 10 μsec. the maximum applied pulse energy for MXP-35 is a result out of the nominal power 35 W divided by the operating frequency (at 25°C bottom case) ($E = 35 \text{ W} / f$)

Pulse Power Curve (typical rating for MXP-35)

The power curve shows the max. possible power which can be applied for a certain duration. Referring to the same test procedure as described above.

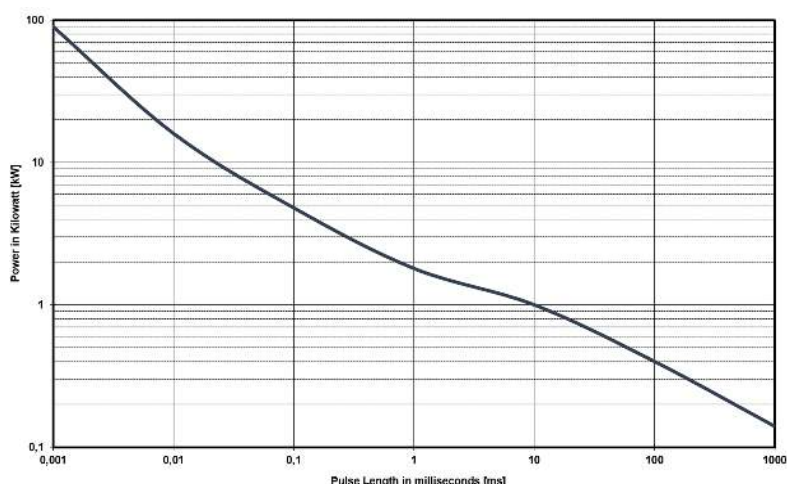

Description of Pulse Power Curve

- Shape of pulse = e-function
- Time between two pulses = 1 second
- Pulse length = time constant of 1 tau
(1 means ... tau = 1ms)

Example

For the time-constant of 1 ms you can apply about 1.8 kW max., if the time between two such peaks is ≥ 1s