

Power Ring Film Capacitor 425 μ F, 900 Vdc

The 700D42799-407 Power Ring is a 900 Vdc, 425 μ F DC Link Capacitor with an ESR of 180 micro-Ohms at 20 kHz and an ESL of less than 5 nH.



Electrical Specifications

Part #: 700D42799-407

Capacitance/Tolerance: 425 μ F \pm 10%

DC Voltage Rating: 900 Vdc

Dielectric/Construction: Metallized polypropylene.
Single section design

Dielectric Withstand Voltage: Units 100% tested at DC potential of 1125 Volts for two minutes at 25°C

ESL: Less than 5 nH in a suitable laminar bus structure


Thermal Resistance: 0.92°C/W (case side cooling only)
0.44°C/W (case and bus side cooling only)

Operating Temperature: -40°C to +85°C at full DC voltage rating


Voltage, Temperature De-rating: De-rate voltage linearly to 700 Volts from +85°C to +107°C, with respect to hotspot temperature

System Fault Current Rating: 10,000 Amps maximum (external to the capacitor)

Typical ESR vs. Frequency:

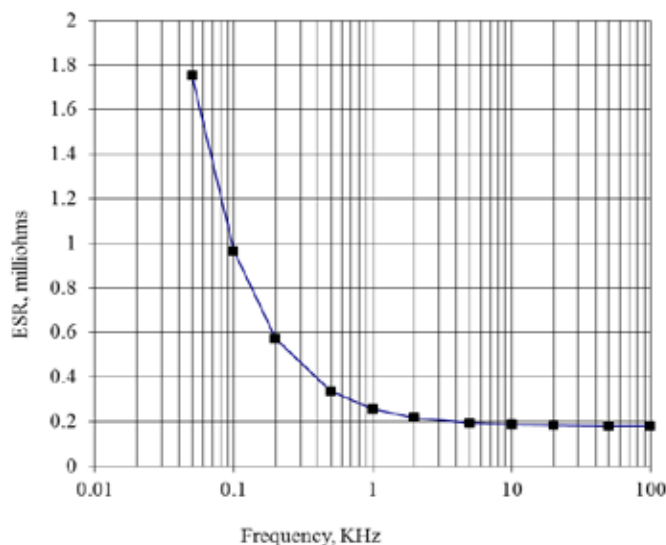

RMS Current Rating:

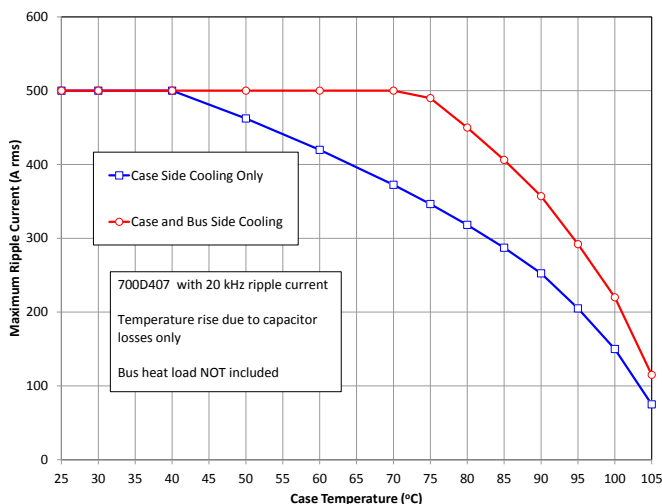

Advanced Conversion reserves the right to amend design data

At the Leading Edge of Film Capacitor Technology


Mechanical Specifications

Dimensions: See layout drawing for details
Terminals: Tin plated copper, 0.032" thick
Encapsulation: Molded polymeric case, potted with RTV silicone

Marking: APCS company identification
 700D407 Unique part number
 425 μ F \pm 10% Capacitance value and tolerance
 900 Vdc DC voltage rating
 yyww-lot#-unit Serial number (date code, lot number, unit number)

Layout Details:

Contact Advanced Conversion to discuss your specific requirements.

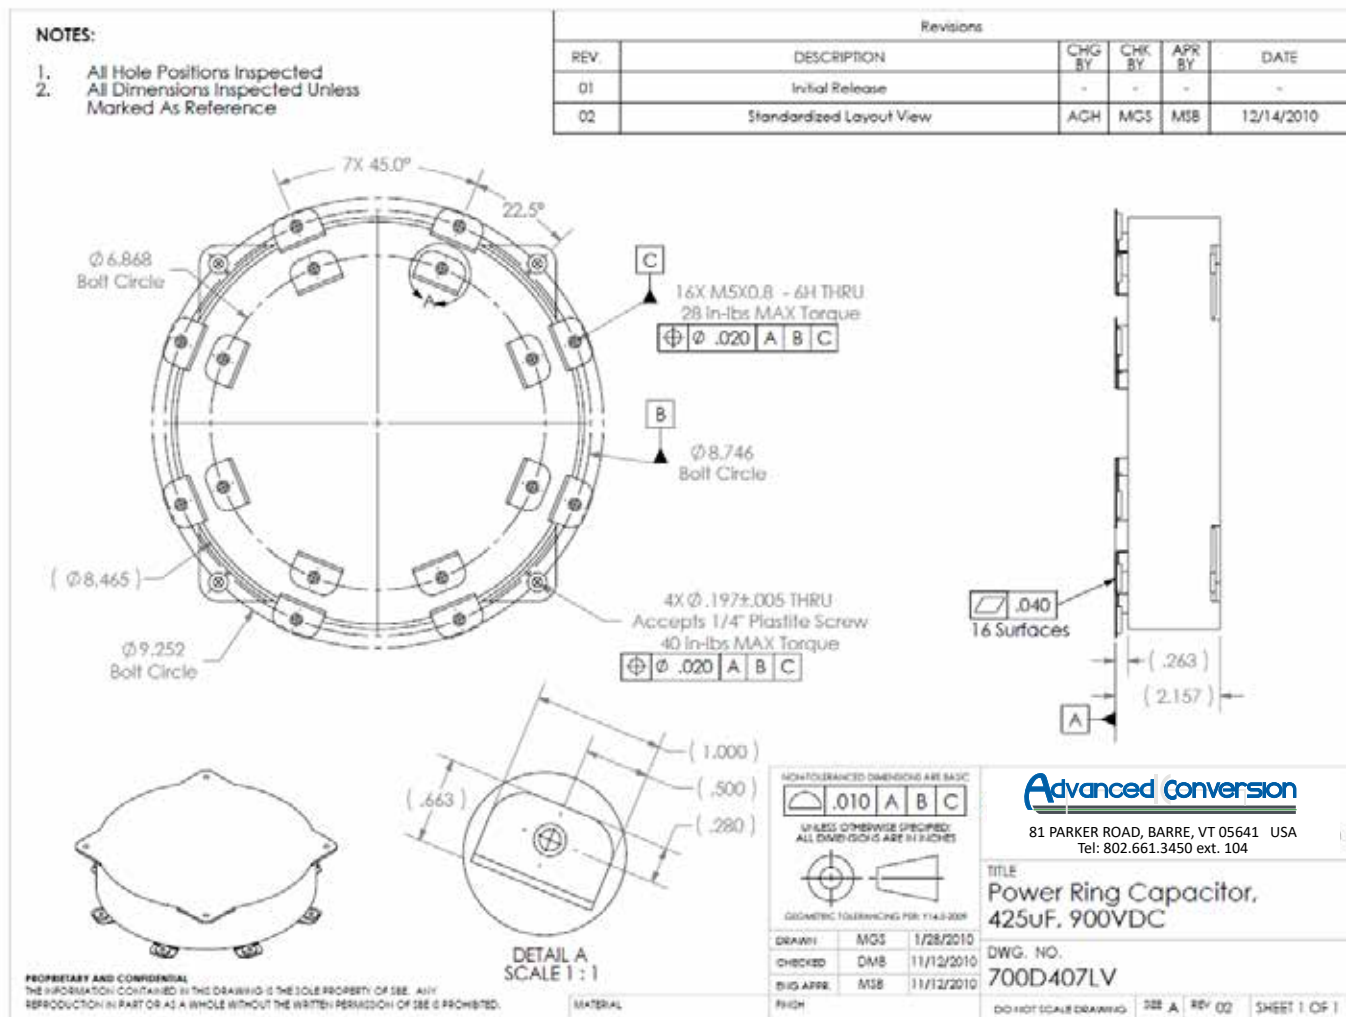

#700D407-03/21

Advanced Conversion reserves the right to amend design data